





● 命名表示 / Ordering Core System

TN20H RH - A - B - C

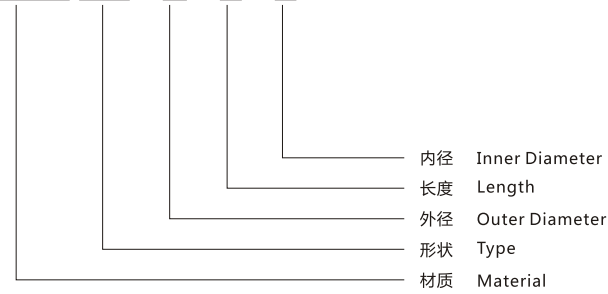

型号 TYPE	尺寸 Dimensions (mm)			图例 FIG
	A	B	C	
RH-1.4-4-0.8	1.40±0.1	4.00±0.1	0.80±0.07	1
RH-1.9-3.8-1.1	1.90±0.1	3.80±0.25	1.10±0.07	1
RH-3.0-12-1.0	3.00±0.15	12.00±0.4	1.00±0.1	1
RH-3.5-5.7-0.8	3.50±0.15	5.70±0.4	0.80±0.1	1
RH-3.5-4-1.0	3.50±0.15	4.00±0.3	1.00±0.1	1
RH-3.5-4.5-1.0	3.50±0.15	4.50±0.4	1.00±0.1	1
RH-3.5-6.0-1.0	3.50±0.15	6.00±0.4	1.00±0.1	1
RH-3.5-4-1.2	3.50±0.15	4.00±0.3	1.20±0.15	1
RH-3.5-5-1.2	3.50±0.15	5.00±0.4	1.20±0.15	1
RH-3.5-6-1.2	3.50±0.15	6.00±0.4	1.20±0.15	1
RH-3.5-3-1.3	3.50±0.15	3.00±0.2	1.30±0.15	1
RH-3.5-5-1.3	3.50±0.15	5.00±0.4	1.30±0.15	1
RH-3.5-1.3-1.5	3.50±0.15	1.30±0.15	1.50±0.15	1
RH-3.5-4.5-1.5	3.50±0.15	4.50±0.4	1.50±0.15	1
RH-3.5-5-1.5	3.50±0.15	5.00±0.4	1.50±0.15	1
RH-4-10-2	4.00±0.2	10.00±0.4	2.00±0.2	1
RH-4-15-1.35	4.00±0.2	15.00±0.4	1.35±0.2	1
RH-5-13-2.2	5.00±0.5-0.15	13.00±0.6-0.2	2.20±0.25	1
RH-5-13-3.0	5.00±0.4-0.2	13.00±0.5-0.2	3.00±0.25-0.1	1
RH-6-8-3	6.00±0.2	8.00±0.3	3.00±0.2	1
RH-6-10-3	6.00±0.15	10.00±0.25	3.00±0.15	1

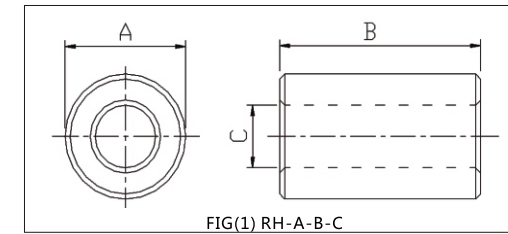

- 适用材质 / Available Material : TN12B/ TN65B/ TN80G/ TN100B/ TN200B etc.
- 用途 / Application : 产品主要适用于磁珠滤波器等抗干扰/ EMI Coil

型号 TYPE	尺寸 Dimensions (mm)			图例 FIG
	A	B	C	
RH-6-12-3	6.00±0.2	12.00±0.3	3.00±0.15	1
RH-6.35-25.4-3.2	6.35±0.15	25.40±0.75	3.20±0.25	1
RH-9-13.6-5.3	9.00±0.2	13.60±0.5	5.30±0.3	1
RH-9-15.3-4.3	9.00±0.3	15.30±0.4	4.30±0.15	1
RH-12-15.3-7.3	12.00±0.4	15.30±0.5	7.30±0.4	1
RH-12-23-5.2	12.00±0.3	23.00±0.5	5.20±0.3	1
RH-12.3-25.4-5.08	12.30±0.4	25.40±0.75	5.08±0.15	1
RH-12.7-10-7.9	12.70±0.3	10.00±0.3	7.90±0.3	1
RH-12.7-12.7-7.9	12.70±0.3	12.70±0.3	7.90±0.3	1
RH-14.3-28.6-6.35	14.30±0.5	28.60±0.8	6.35±0.4	1
RH-15.9-28.6-7.9	15.90±0.4	28.60±0.8	7.90±0.3	1
RH-15.9-50.8-7.9	15.90±0.4	50.80±1.0	7.90±0.3	1
RH-16-10-9.0	16.00±0.3	10.00±0.3	9.00±0.3	1
RH-16-16-9.0	16.00±0.3	16.00±0.3	9.00±0.3	1
RH-17.5-13.5-9.5	17.50±0.4	13.50±0.4	9.50±0.3	1
RH-17.5-28.5-9.5	17.50±0.4	28.50±0.75	9.50±0.3	1
RH-18-28-9.7	18.00±0.5	28.00±0.8	9.70±0.3	1
RH-18.7-28.6-10.15	18.70±0.6	28.60±0.8	10.15±0.4	1
RH-18.7-50.8-10.15	18.70±0.6	50.80±1.0	10.15±0.4	1
RH-25.9-28.6-12.8	25.90±0.6	28.60±0.8	12.80±0.5	1
RH-28.5-28.6-13.8	28.50±0.6	28.60±0.8	13.80±0.5	1
RH-31.1-50.8-19.05	31.10±0.85	50.80±1.0	19.05±0.6	1